
QUICK RELEASE COUPLING





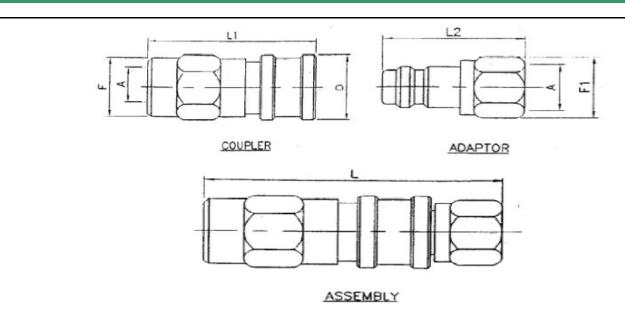

| Size | Part No. | Α - | Dimensions in mm | | | | | | W.P. |
|--------|----------|-----------|------------------|----|----|----|----|-----|------|
| | | | D | F | F1 | L1 | L2 | L | PSI |
| 1/8" | QRC - V1 | 1%"BSP | 19 | 16 | 14 | 41 | 27 | 54 | 500 |
| 1/4" | QRC - V2 | 1/4"BSP | 24 | 21 | 19 | 53 | 33 | 70 | 500 |
| %" | QRC - V3 | %"BSP | 24 | 24 | 22 | 55 | 35 | 73 | 500 |
| 1/2" | QRC - V4 | 1/2"BSP | 34 | 28 | 28 | 58 | 42 | 89 | 500 |
| 3/4" | QRC - V5 | %"BSP | 40 | 35 | 32 | 83 | 45 | 107 | 500 |
| 1" | QRC - V6 | 1"BSP | 42 | 50 | 40 | 84 | 50 | 111 | 500 |
| 1 1/4" | QRC - V7 | 1 1/4"BSP | 49 | 50 | 50 | 89 | 54 | 120 | 500 |

NB:- TYPE - V COUPLING IS WITH SELF SEALING VALVE AT COUPLER END AND THROUGH ADPTOR

INBUILD CHECK VALVE IN COUPLER SIDE ONLY & ADAPTOR SIDE THROUGH TYPE

SEALING INSIDE - NBR RING

